

StyroCrete

Unlimited Creativity



StyroCrete is a specially formulated high strength cement and polymer additive mix designed for coating expanded Polystyrene (EPS) architectural foam shapes.



StyroCrete is...



Photo supplied by the Gingerbread Trim Company.

A high strength

polymer cement mix designed with Polymer Concentrate as a concrete foam trim molding, letters and StyroCrete will increase the durability to the surface of StyroCrete mix may be in Marbelite Tint Kit or may be painted.

Features:

- Hard textured surface
- Hand trowel or hopper gun
- Tinted or paintable
- Use with mesh or without
- Exterior or interior use
- Hard in several hours
- Spray will conform to any surface
- Will not run or sag when applied
- Excellent hardness over time
- Can be sprayed rough "stone" or a "coralized" stone look
- No screeding necessary

Additional Applications:

- Spray on walls for a variety of textures and bubble coat.
- Trowel on walls for a stucco finish
- Spray "Knock Down" style on decks and patios.
- Simulated landscape rock
- Restore existing precast architectural



th

to be used with StyroCrete
ing over Polystyrene (EPS)
panels interior or exterior.
grity and add strength and
y Styrofoam® shape. The
gally colored using the
ted after complete drying.

To Apply:

StyroCrete may be applied
with either an undercoating
gun (pressurized or siphon
fed) or drywall texturing hop-
per gun. StyroCrete will bond
to Polystyrene (EPS) coatings
when Mar-Flex Elastomeric
Bonding Additive is used.



Cutting Machine photo supplied by Croma.

spray

shape
orrectly applied
30 day cure time
d finish" or simulate

Applications:

of textures such as knock

o finish
trowel for concrete pool

itectural forms & structures



StyroCrete stain colors...

StyroCrete may be painted with Stain Seal 500 or any good quality exterior paint.

- Unlimited colors
- May be tinted on jobsite with the Marbelite Tint Kit.



Marbelite Tint Kit


Case Studies ...



Before



After

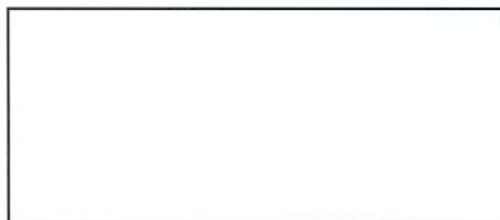

* Your Applicator/Contractor is not an agent or employee of the Marbelite International Corporation.



544 Interstate Court • Sarasota, FL 34240
(941) 378-0860

Web: www.marbelite.com
E-mail: marbelite@aol.com

LIMITATION OF LIABILITY: This warranty is made in lieu of any and all other warranties expressed or implied. Under no circumstances shall the Manufacturer be liable for incidental, consequential or other damages for alleged negligence, breach of warranty, or strict liability arising out of the use or handling of this product. Before application, the User shall determine the suitability of the product for his intended use and User assumes all risks and liabilities whatsoever in connection therewith. Marbelite Products are not intended for use with other manufacturer's products. Marbelite offers no performance warranty on any installations where other manufacturer's products have been used in conjunction with the Marbelite Product Line. Marbelite warrants that if any goods supplied prove defective in workmanship or material, that Marbelite shall replace them or refund the purchase price. **TO THE APPLICATOR** Marbelite International Corporation offers its products in good faith, but without any guarantee to the end consumer, as conditions of the surface to be applied to and methods of application used by the Applicator are beyond our control. Any guarantee or warranty on the installation of Marbelite Products given to the end consumer or others will be solely and independently offered by the Applicator/Contracting company at their option.